




**Model: K1114 Series**  
 Chrome, Brushed Nickel PVD.




**Single Handle Kitchen Pull-down Faucet**  
 3 Hole or Single Hole Installation

**Helpful Information**


**Helpful Tools:**

Gather the necessary tools as shown below to complete the installation of this faucet. Some may not be needed depending on the model of faucet you are installing. Check with your local hardware store on the requirements of your installation situation.

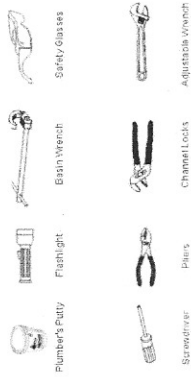

1

**Install With Deck Plate**




1. Remove the mounting nut, rubber and metal washer from the faucet.
2. Press the sponge putty gasket on to the cover plate. Install the deck plate over the 3 holes of your sink.
3. Insert faucet supply tubes and mounting shank through the hole in the deck plate.
4. From underneath sink, place washer and mounting nut over pull-out hose and supply tubes. Thread loosely onto faucets shank and tighten the 3 nuts to the screw heads.
5. **CAUTION:** Make sure hose is properly engaged and secure in faucet hose quick connector.
6. Locate lowest point of the hose on the spout side and attach hose weight kit.
7. **CAUTION:** Do not use faucet supply tubes to supply stops.
8. **CAUTION:** Do not use O-ring. Over tightening supply nuts may damage washer or crack the supply nuts.
9. Remove spray head from faucet and flush water through faucet to any line in the countertop or sink.
10. Assemble spray head and run water through faucet while checking for leaks at all connections.

3

2


**Install Without Deck Plate**

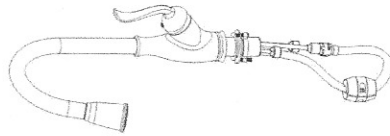

1. Remove the mounting nut, rubber and metal washer from the shank of the faucet.
2. Insert faucet supply tubes and mounting shank through the hole in the countertop or sink.
3. Following step (4) to (8) from page 3.

4

**Configuration**

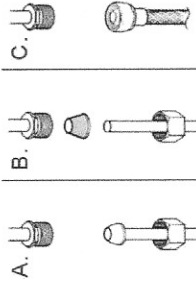

Connect to water supply lines with either:  
 (A) 3/8" O.D. Copper tubing (ball nose reiers with the coupling nuts or;  
 (B) 3/8" Copper tubing (no ball) with supplied tube head interior connector or;  
 (C) IPS faucet connectors (1/2")



**Important:**  
 Tighten connection with two wrench to prevent damage to tube body. Be careful not to bend the stem as this will void the product warranty.

5

**Parts List**

NO.	Pattern code	Pattern name	Q.TY
32	P 11.07.002101	Spout	1
31	P 07.00.005	Assembly	2
30	P 20.11.004101	Supply Hose	1
29	P 07.00.003	Hose O-Ring	1
28	P 17.10.015001	Supply	1
27	P 17.10.015001	Deck	1
26	P 02.00.0101	Washer	1
25	P 22.00.011001	Washer (Ball)	1
24	P 07.00.004	Supply Hose Gasket	1
23	P 03.04.008	Set Screw	3
22	P 10.33.005	Mount Nut	1
21	P 10.31.002	Shank	1
20	P 10.04.002	Clamp	1
19	P 22.00.015	Hose Quick Connect	1
18	P 06.00.003	Gasket	1
17	P 06.00.007	O-Ring	1
16	P 20.01.005	Supply Hose	1
15	P 20.01.006	Supply Hose	1
14	P 06.00.004	O-Ring	1
13	P 10.10.010101	Ring	1
12	P 20.01.007	Supply Tube	1
11	P 06.00.003	O-Ring	0
10	P 10.30.00101	Body	0
9	P 12.11.008	Swivel Core	1
8	P 10.30.003	Ceramic Cartridge	1
7	P 03.13.004	Lock Nut	1
6	P 02.04.007101	Trim Cap	1
5	P 03.00.017	O-Ring	2
4	P 03.01.006	Set Screw	1
3	P 01.15.02101	Handle	1
2	P 03.01.001	Set Screw	1
1	P 02.07.002101	Basin	1

7

**Parts Diagram**

